

ELECTRONIC CALIPERS

799 ELECTRONIC CALIPERS



0-40"/0-1000MM

The 799 Electronic Caliper is light, comfortable, easy-to-use, and constructed with features that have made Starrett slide calipers the machinist's first choice for many years.

The 799 offers a slim, streamlined profile, a large, clear, easy-to-read LCD display, long battery life, and function buttons for zero and inch/mm.

799 are available in 0-6", 0-8", and 0-12" sizes and the newly available extended range 24" and 40". All sizes furnished in a fitted, protective case.

FEATURES (ALL SIZES)

- Lightweight, ergonomic design
- Inch/millimeter conversion reads .0005" or 0.01mm
- Easy access to the single, long-life battery
- Last measuring position retained when shut off
- Hardened stainless steel body for long life
- Fine adjustment thumb wheel
- Lock screw to hold the slide in position
- Resolution is .0005" (0.01mm)
- Zero at any position

799 Electronic Calipers		
Range	Cat. No.	EDP
0-6" (150mm)	799A-6/150	67410
	799A-6/150 W/SLC†	67620
0-8" (200mm)	799A-8/200	67412
	799A-8/200 W/SLC†	67413
0-12" (300mm)	799A-12/300	67621
0-24" (600mm)	799AZ-24/600	11978
0-40" (1000mm)	799AZ-40/1000	11979

Accessories and Case Information for 799 Electronic Calipers		
Description	Cat. No.	EDP
Center distance attachment*	PT26151	64440
Depth attachment for 6", 9" and 150mm calipers	PT22431	64640
3 Volt battery; CR2032	PT99492	65650
Deluxe padded case for 0-6" (150mm) calipers	723ZZ-6/722ZZ-6	57070
Finished wood case for 0-8" (200mm) calipers	950	63878
Finished wood case for 0-12" (300mm) calipers	946	56695

* See details in this section.

†Includes redemption card for Standard Letter of Certification (SLC).

Approximate Jaw Depths for 799 Electronic Calipers


	6" (150mm)	8" (200mm)	12" (300mm)	24" (600mm)	40" (1000mm)
Outside	1-1/2" (38mm)	2" 50.8mm)	2-1/2" (63.5mm)	4" (100mm)	6" (150mm)
Inside	5/8" (16mm)	3/4" (19mm)	23/32" (18.3mm)	11/16" (17.46mm)	11/16" (17.46mm)

6", 8" AND 12" CALIPERS ONLY

- Large easy-to-read LCD, .32" high characters
- Automatic shut-off after 5 minutes of nonuse
- Linear accuracy meets DIN862
- Integrated depth rod

EXTENDED RANGE 24" AND 40" CALIPERS

- Preset and hold feature
- Minimum and maximum limits set
- I.D. jaw dimension is 0.800"/20.32mm
- LCD characters are .50" high
- Auto shut-off after 30 minutes of non-use

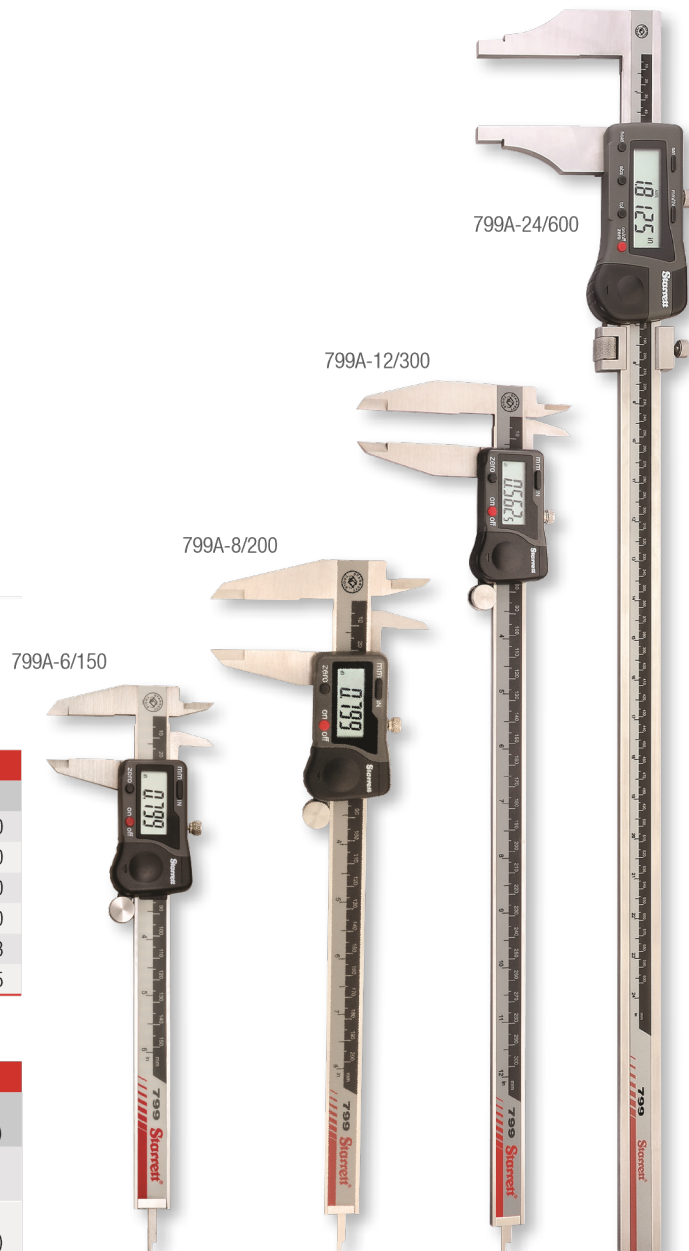

SLIDE CALIPERS



Check out our website for interactive features at starrett.com

